


Order no.	Packing unit	PS
-----------	--------------	----

Order no.	Packing unit	PS
-----------	--------------	----

**Bus coupler**

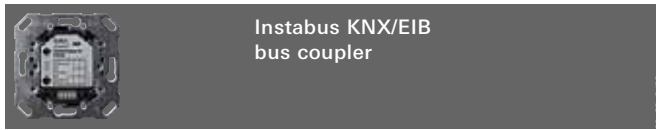

Bus coupler	<b>0570 00</b>	1/5	06
-------------	----------------	-----	----

**Product family:** System devices  
**Product type:** Bus coupler

The flush-mounted bus coupler is the interface between the Instabus and the user module, e.g. push button sensor, info display, continuous regulator, data interface etc. The bus coupler can receive, send and evaluate telegrams. It contains the address, the system program and user-specific programs. Release of the programming of the physical address by pressing the programming button.  
 Status indication by red programming LED.  
 Only suitable for flush-mounted wall boxes with screw attachment.

Power consumption: max. 150 mW  
 Connections: Instabus via connection and branch terminal **0595 00**  
 User module via plug connector 2 x 5-pole

Temperature range: -5 °C to +45 °C  
 Protection type: IP 20  
 Dimensions: Installation depth 32 mm

**Instabus connection and branch terminal 0595 00 → Page 377.**